
## Wheel Set Assembly Instructions **ENDRESS**



Applies to: ESE206 HS-GT / ESE306 HS-GT / ESE406 HS-GT / ESE506 DHS-GT / ESE606 (D)HS-GT

Order-No. 161026

The fundamental requirement for ensuring that the set of wheels can be used correctly is that each of the components must be installed precisely as shown in the illustrations. You must ensure that you do not omit to fit any of the components, including the mounting components (bolts and nuts) in order to prevent unpleasant consequences from occurring.

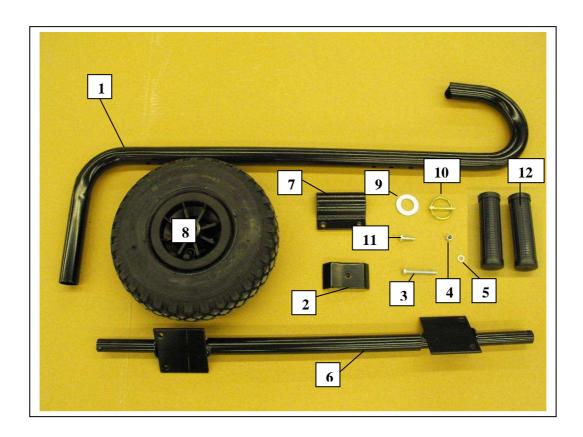


- 1. Support handle x 2
- 2. Clamp x 8
- 3. M6x50 bolts **x 4**
- 4. M6 locking nuts x 8
- 5. M6 washers **x 16**
- 6. Axle (split into two halves)
- 7. Stirrup x 2
- 8. Wheel **x 2**


- 9. washers x 2
- 10. Linchpin x 2
- 11. Bolts M6x20 x 4
- 12. PVC handle-grips x 2

Issued: 10<sup>th</sup> January 2011 Document-No. E133992

## Wheel Set Assembly Instructions **ENDRESS** \*\*\*




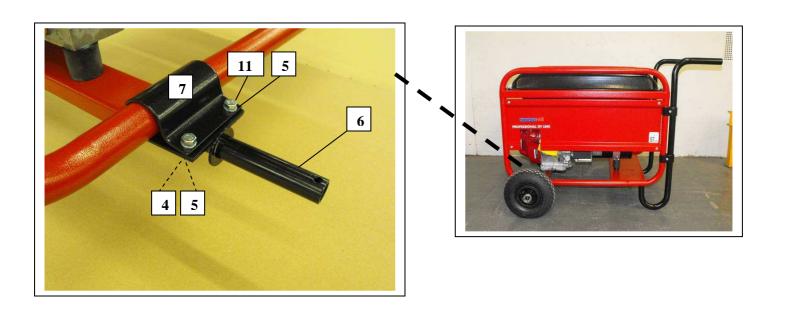

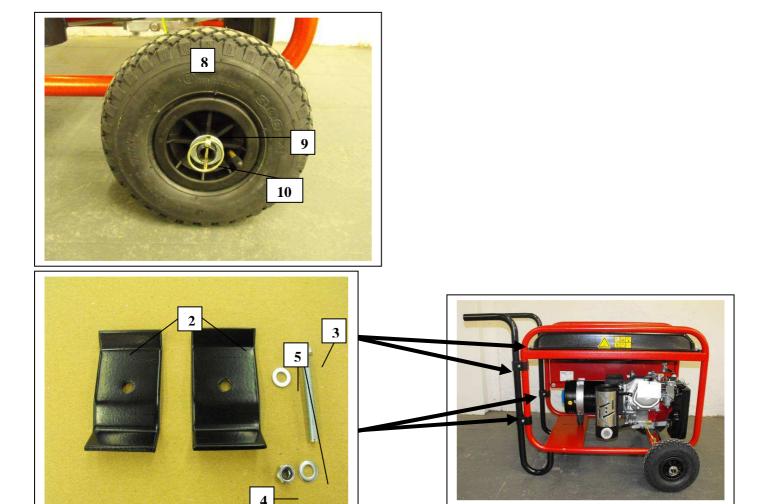

## Wheel Set Assembly Instructions **ENDRESS** \*\*\*



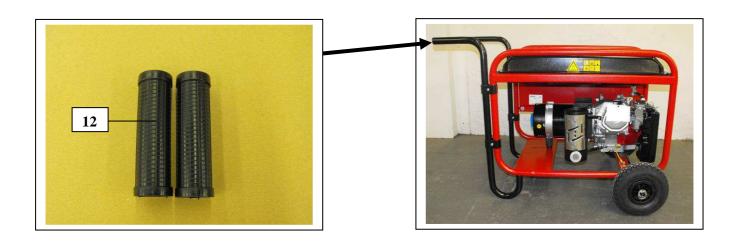

Issued: 10<sup>th</sup> January 2011 Document-No. E133992